



EVICA EP80+

**Technical details** EP80+


<b>Cooling</b>	Force cooled
<b>Noise dBA</b>	25.4
<b>IP rating</b>	IP65
<b>Operating Temperature Degrees C</b>	-20 to +40
<b>Light Source Fidelity</b>	80W
<b>LED Luminous Flux (Lm)</b>	6500K/ 8750 <b>Options</b> 3000K/5600K 4000/7000
<b>Standard CCT</b>	6500K <b>Options</b> 3000K/5600K/UV 395nm 60'000mW
<b>Standard CRI</b>	80 <b>Options</b> 98+
<b>Luminaire Supply Voltage (Vdc)</b>	48
<b>Luminaire supply current (mA)</b>	2000
<b>Input Power</b>	80w
<b>Recommended IP67 Drive module (on board dim)</b>	ELG-100-48
<b>Lamp housing material</b>	Aluminium
<b>Lamp housing finish (standard)</b>	Anodised
<b>Lamp housing finish (special order)</b>	RAL Powder coated
<b>Weight (Kg)</b>	1.8
<b>Gobo</b>	Size E 37.5mm (active 24mm)
<b>Mounting Yoke hole</b>	13mm
<b>Objective Lens assemblies</b>	N(85mmfl)/M(60mmfl)/W(50mmfl)
<b>Image Angle (Narrow lens) degrees</b>	17.6°
<b>Image Angle (Medium lens) degrees</b>	24.2°
<b>Image Angle (Wide lens) degrees</b>	28.6°
<b>LED Lifetime (LM-70)</b>	43,000 Hours (70% Lumen Maintenance)
<b>Options</b>	
<b>Cowl</b>	C2
<b>Integrated Drive Mounting plate</b>	XLG-BRACKET

Evica specifications are liable to change without notice.




Evica specifications are liable to change without notice.

**Standard EP80+ (6500K) 80 CRI**

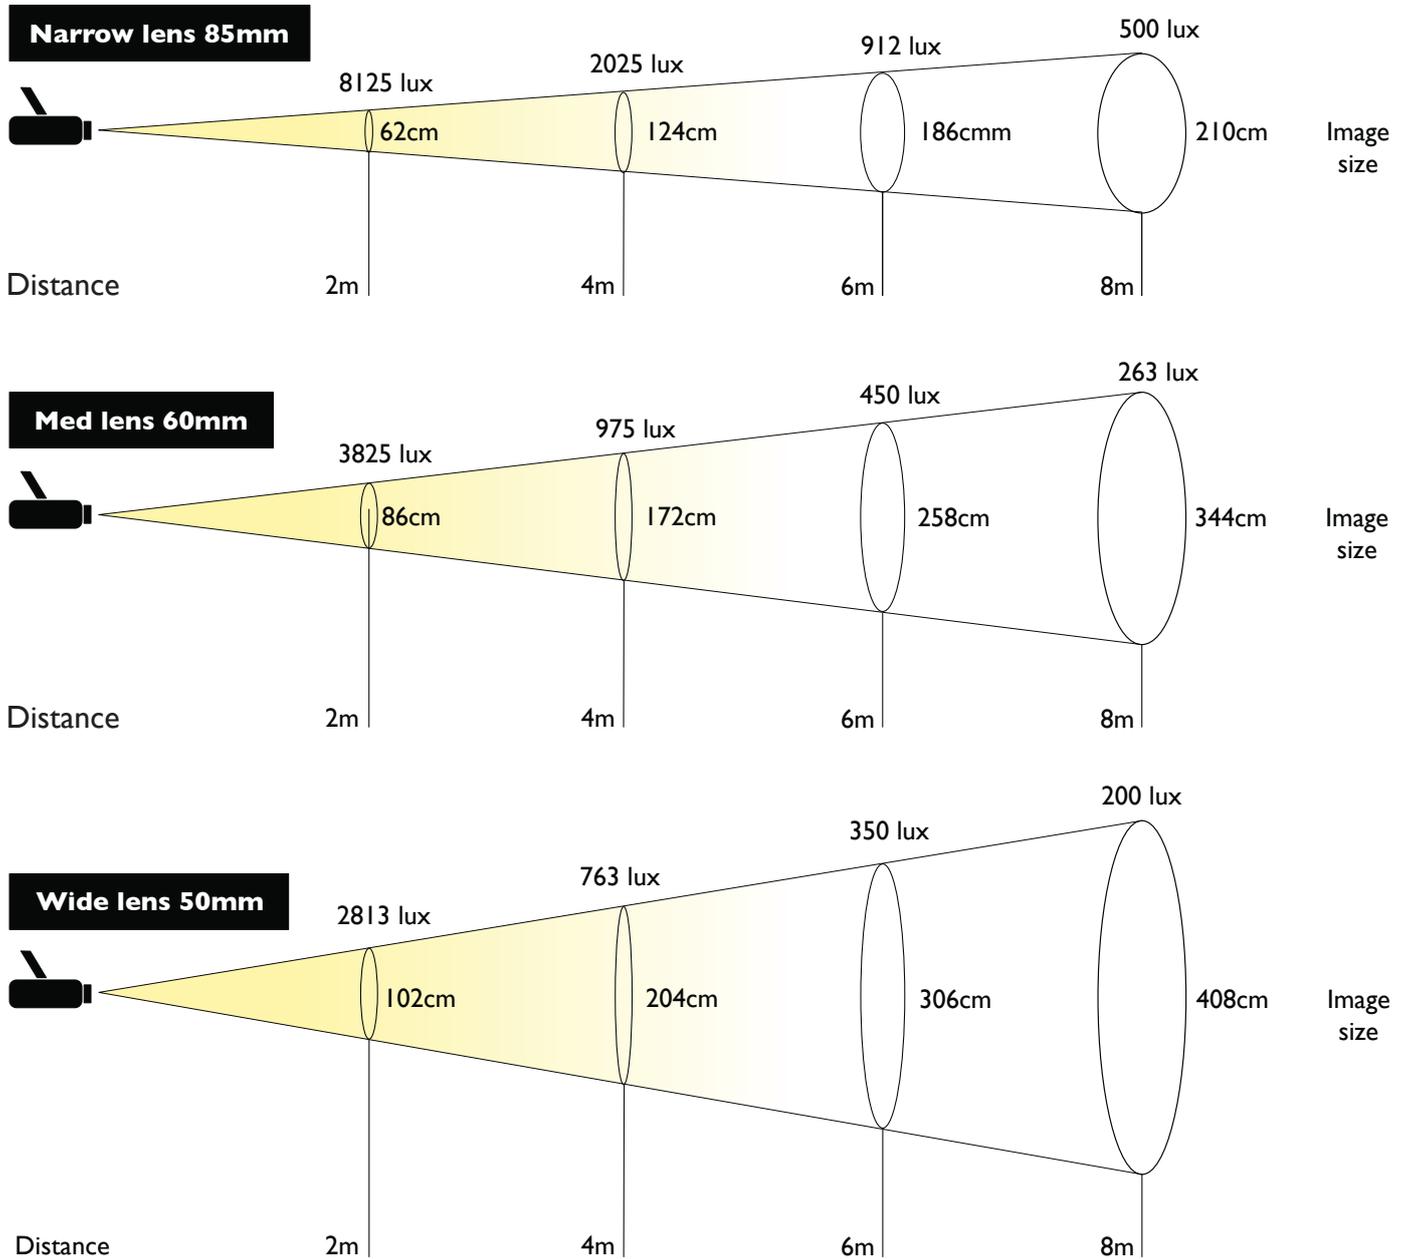


Evica specifications are liable to change without notice.

**EP80+ (5600K) 80 CRI**

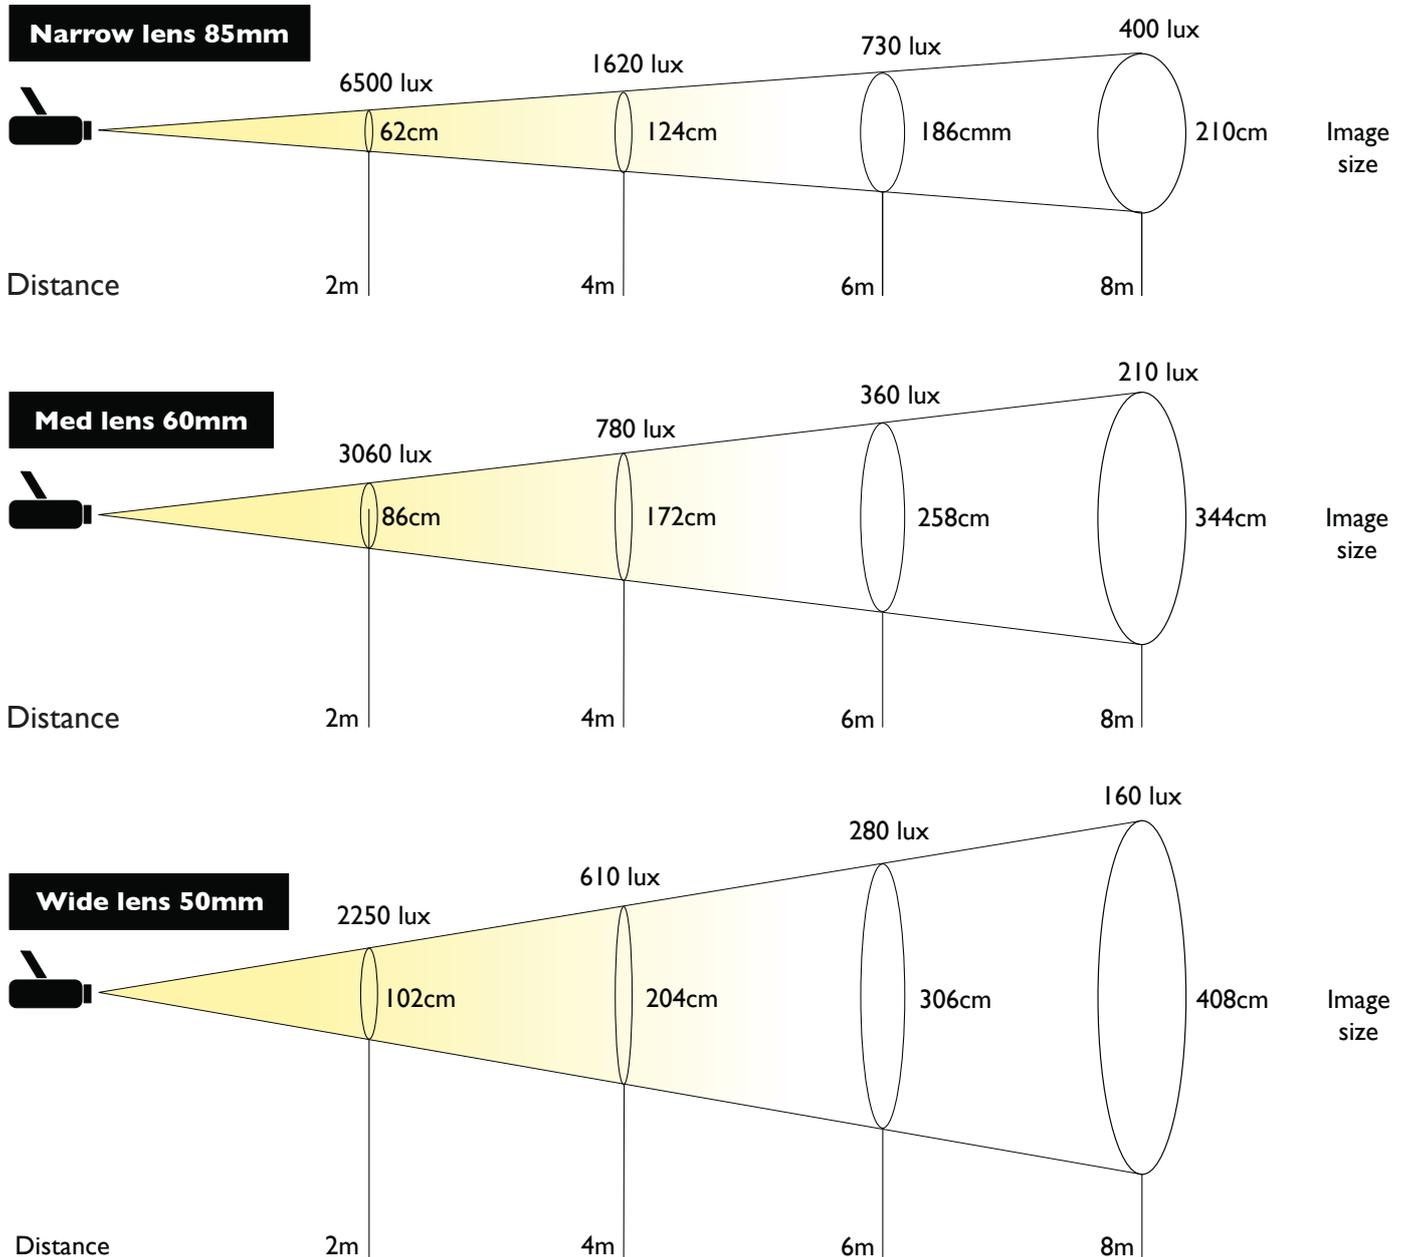


Evica specifications are liable to change without notice.

**EP80+ (3000K) 80 CRI**





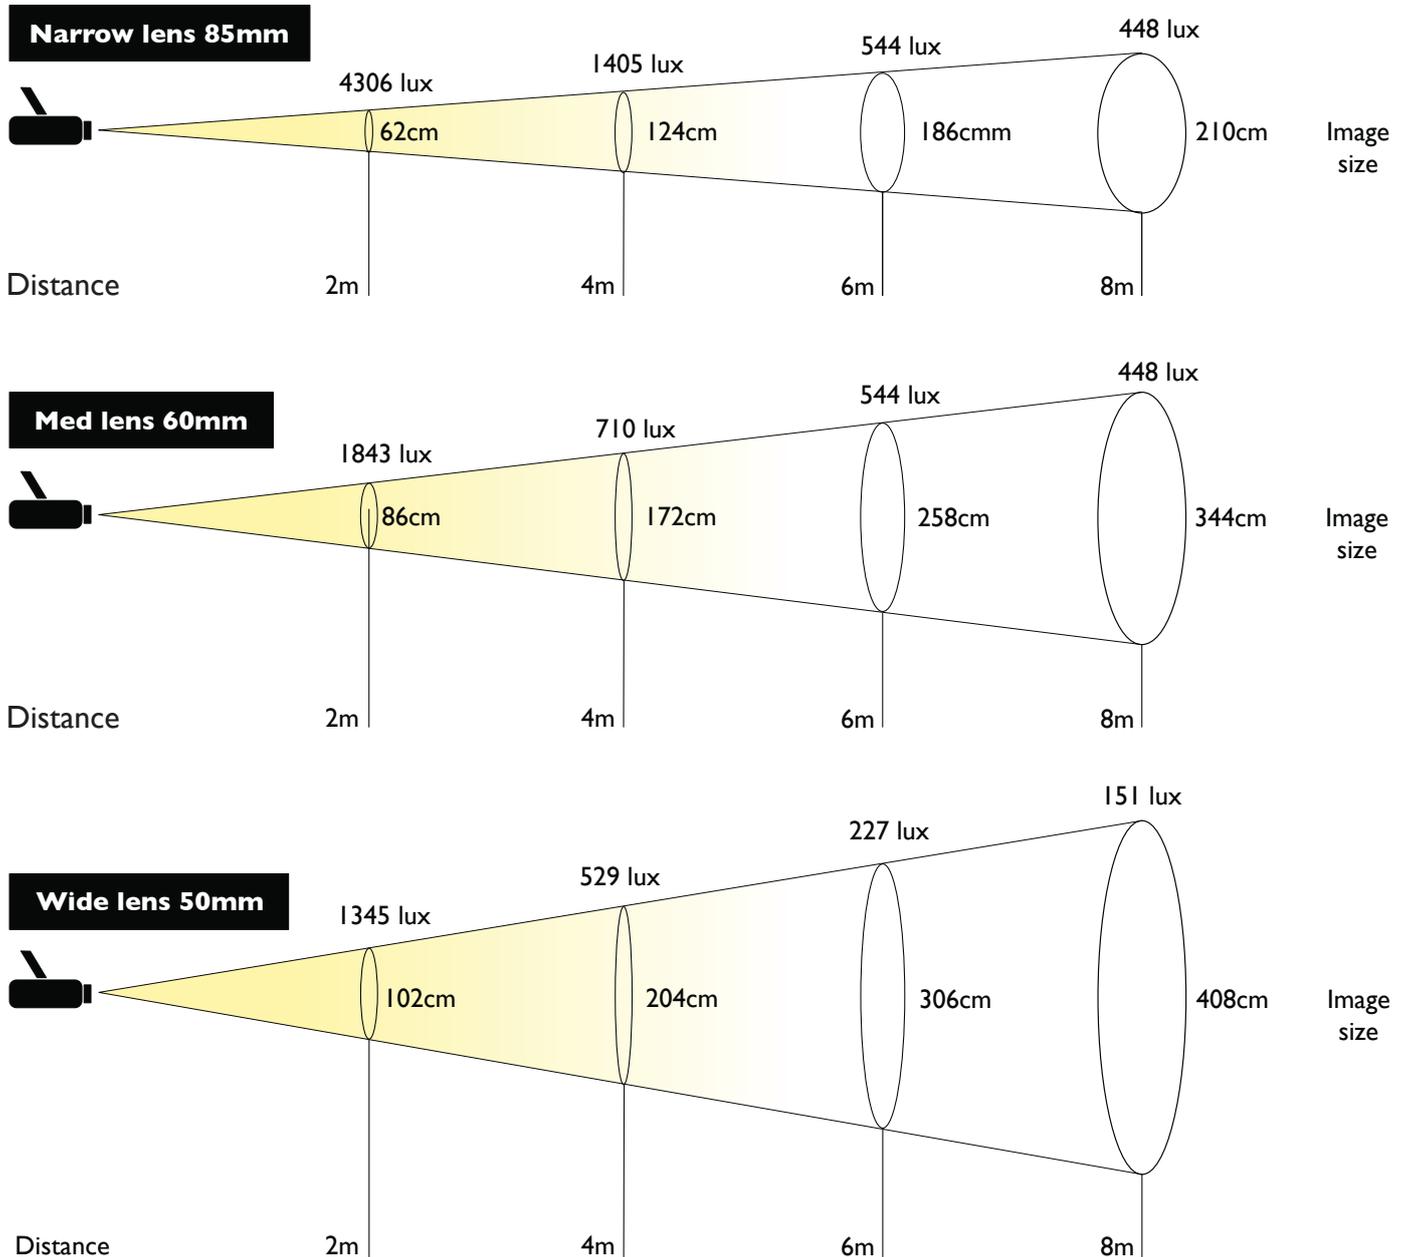


Evica specifications are liable to change without notice.






**EP80+ (3000K) 98 CRI**

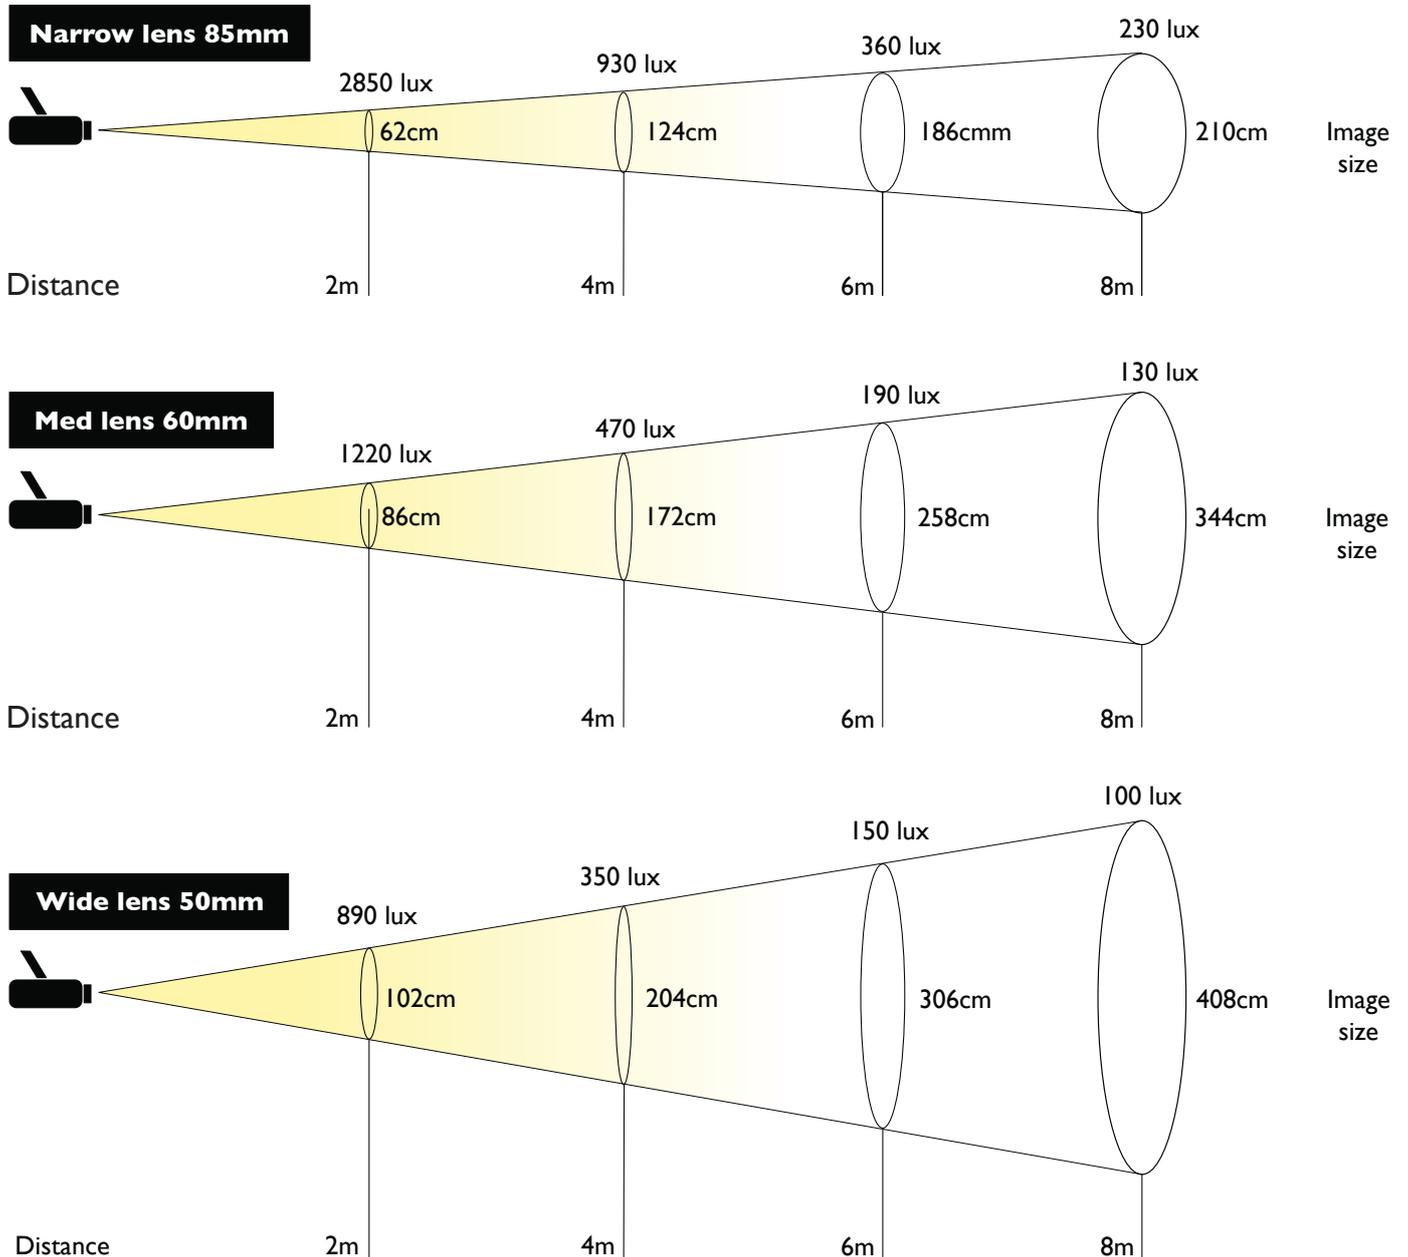

Evica specifications are liable to change without notice.

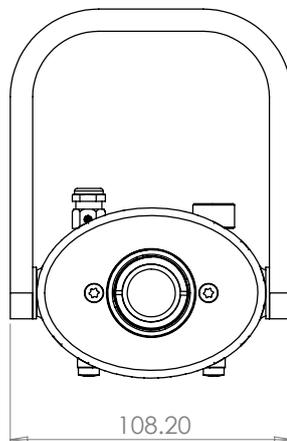
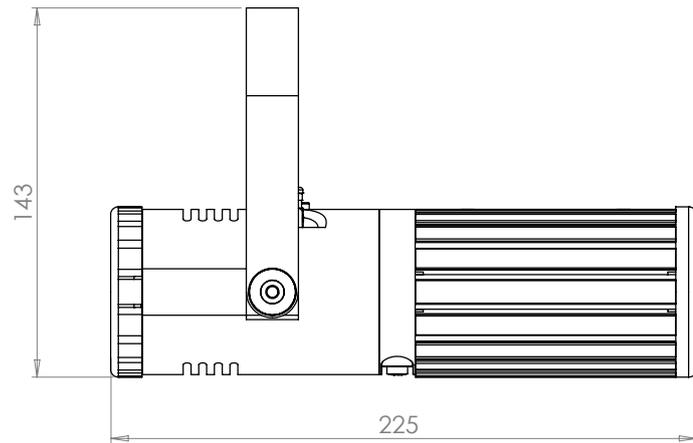
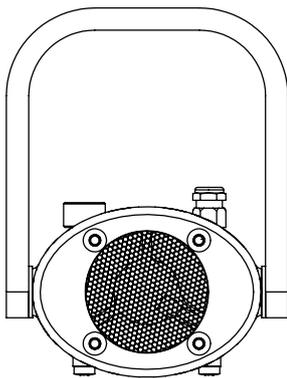
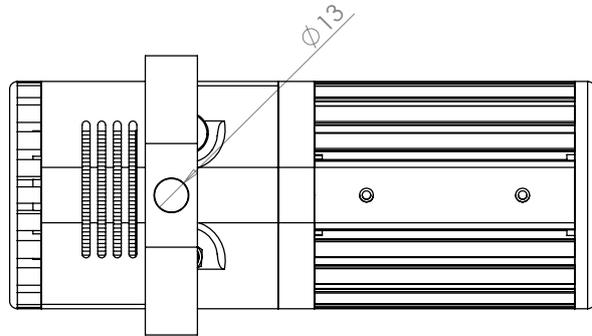
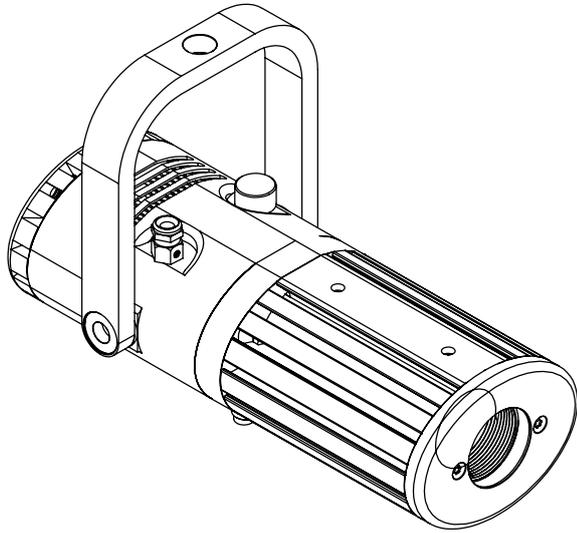


Evica specifications are liable to change without notice.

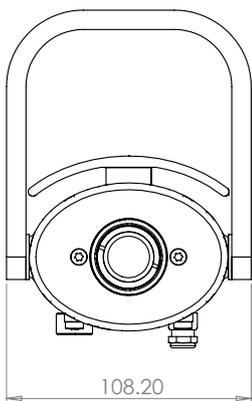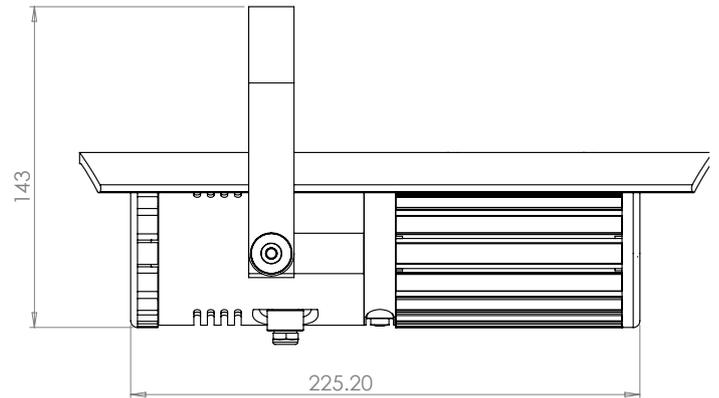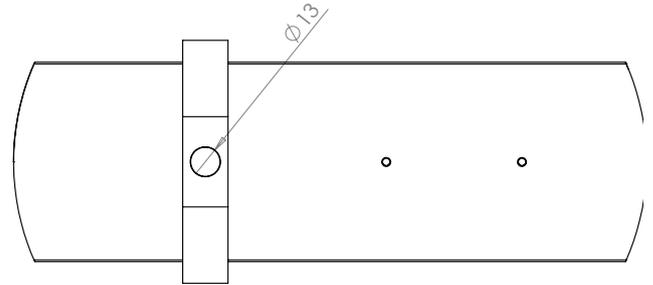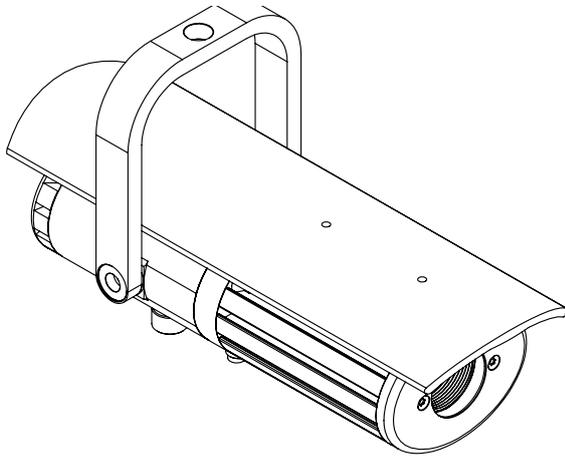

**With cowl unit**

Evica specifications are liable to change without notice.

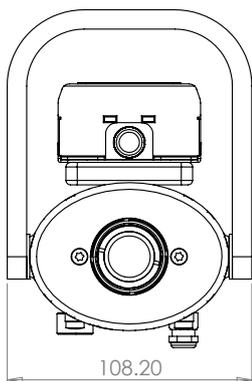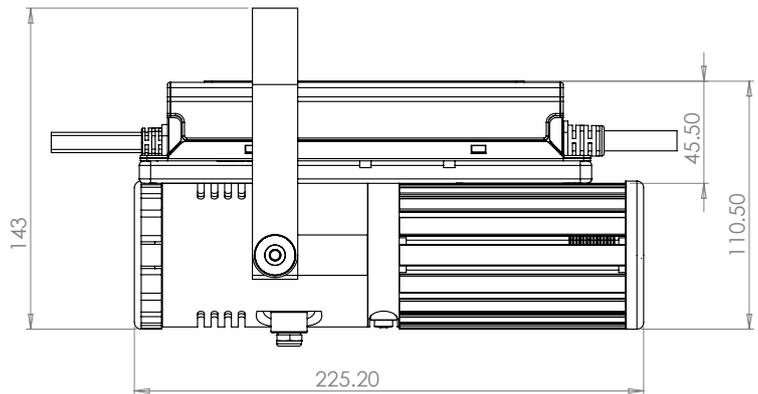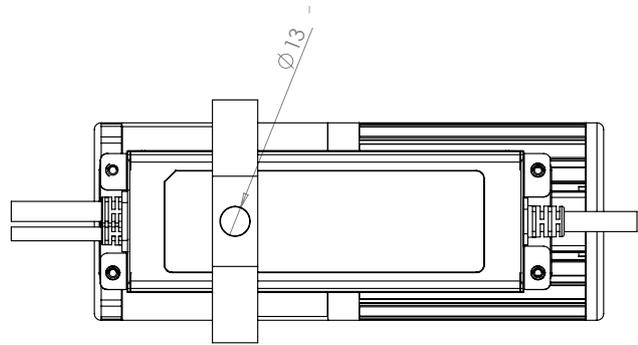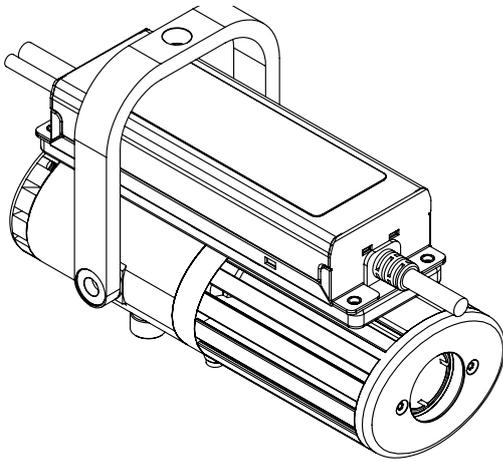

**With drive unit**

Evica specifications are liable to change without notice.

